



Husky™ 3300 Pumps

A Complete Range of 3 inch (76.2 mm)
Air-Operated Double Diaphragm Pumps



- Expanded material offering to handle numerous applications
- Flow rates up to 1135 lpm (300 gpm)
- Modular stall-free air valve design

PROVEN QUALITY. LEADING TECHNOLOGY.

Husky 3300 Pumps



Four Bolt Joint Design

Bolted design provides even sealing pressure for leak-free operation



Modular Air Valve

Stall-free, efficient operation
Quick replacement feature with easy four-bolt design



Pilot Valves

Externally serviceable

Three-piece manifolds

Increased installation flexibility


Center Section Options



Aluminium



Polypropylene

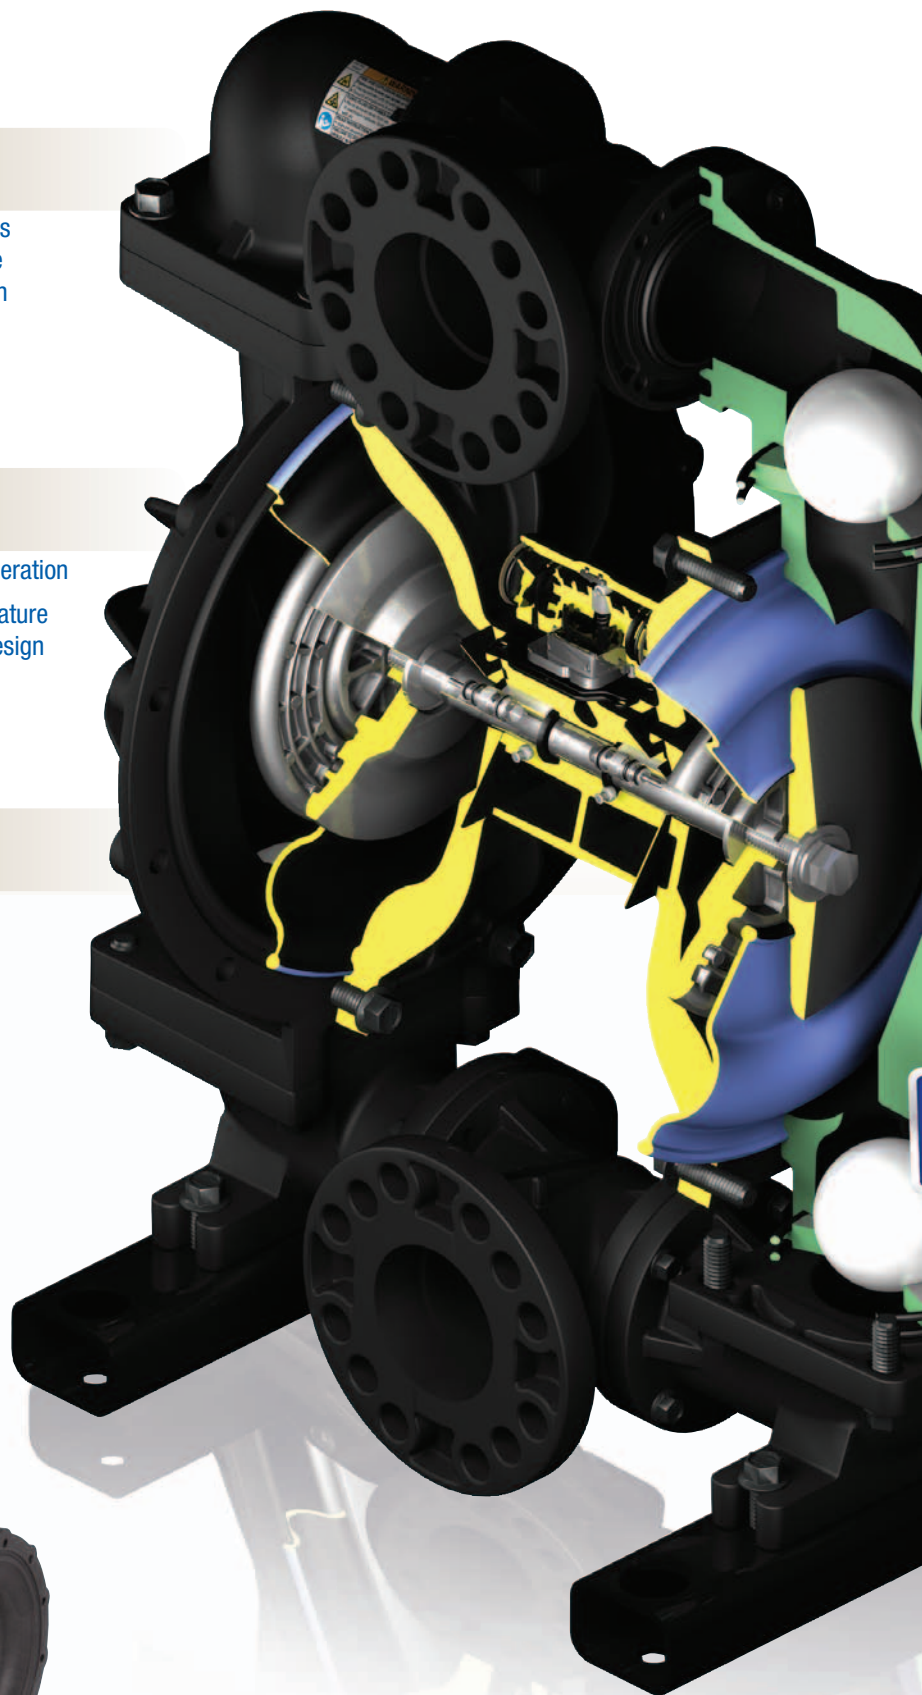

Aluminium Pump

Robust fluid section to handle the most abrasive applications



Stainless Steel Pump

Corrosion free fluid section
easily handles extreme environments



Polypropylene Pump

Overmolded frame provides decreased joint relaxation and increased strength to virtually eliminate fluid leakage

Find the Right Pump for your Application

Graco makes it easy to select a pump that's right for you.

To order a Husky 3300, use the online selector tool at www.graco.com/husky or contact your distributor.

Husky
Air-Operated Double Diaphragm Pumps

Welcome Pump Selector

Pump Size? 1 inch

Pump Material? Aluminum Pump

Air Valve & Center Section? Aluminum Std. Air Valve

Fluid Cover & Manifolds? Standard Porting Inch

Check Style? PP Seat

Ball Style? Thermoplastic Polyester Elastomer Std

Diaphragm? Thermoplastic Polyester Elastomer Sn

Seat & Manifold Seal? PTFE

Ex This product is ATEX certified
II 2 GD c IIC T4

Order number revers look-up
Graco (6 digit) Number?
Old "D" Number?

Graco Order Number: 647000
Order with this number

Old "D" Graco Number: D73955

Replacement Kits
24B766 Aluminum Std Air Valve Replacement Kit
24B635 Poly Seat Kit
24B642 TPE Ball Kit
24B624 TPE Diaphragm Kit

PROVEN QUALITY. LEADING TECHNOLOGY

Example of Product Selector Tool
(only available in English)

Want to schedule maintenance? Use DataTrak or Pulse Output!

- **DataTrak™**
Runaway protection
Tracks material usage
- **Pulse Output**
Cycle count capability



Husky 3300 Technical Specifications

Maximum fluid working pressure		
AL and SST with AL center sections	8.6 bar (0.8 MPa, 125 psi)	
Poly and SST with poly center sections	7 bar (0.7 MPa, 100 psi)	
Air pressure operating range		
AL and SST with AL center sections	1.4-8.6 bar (0.14-0.86 MPa, 20-125 psi)	
Poly and SST with poly center sections	1.4-7 bar (0.14-0.7 MPa, 20-100 psi)	
Maximum air consumption		
AL and SST with AL center sections	9.5 m³/min (335 scfm)	
Poly and SST with poly center sections	7.8 m³/min (275 scfm)	
Air consumption at 4.8 bar (0.48 MPa, 70 psi),		
378 lpm (100 gpm)	2.5 m³/min (90 scfm)	
Maximum free-flow delivery		
Standard diaphragm	1135 lpm (300 gpm) at 8.6 bar (125 psi)	
Standard diaphragm	1059 lpm (280 gpm) at 7 bar (100 psi)	
Maximum pump speed		
Standard diaphragm	103 cpm at 8.6 bar (125 psi)	
Standard diaphragm	97 cpm at 7 bar (100 psi)	
Fluid displacement per cycle		
Standard diaphragm	11 liters (2.9 gal)	
Maximum suction lift		
	2.4 m (8 ft) dry, 8.5 m (28 ft) wet	
Maximum size pumpable solids		
	12.7 mm (0.5 in)	
Sound Power*		
at 3.4 bar (0.34 MPa, 50 psi) and 50 cpm	92 dBA	
at 8.2 bar (0.82 MPa, 120 psi) and full flow	99 dBA	
Sound Pressure**		
at 3.4 bar (0.34 MPa, 50 psi) and 50 cpm	86 dBA	
at 8.2 bar (0.82 MPa, 120 psi) and full flow	93 dBA	
Air inlet size		
	3/4 npt(f)	
Fluid inlet size		
Aluminium (3300A)	3 in npt(f) or 3 in bspt	
Polypropylene (3300P)	3 in raised face ANSI/DIN flange	
Stainless Steel (3300S)	3 in npt(f) or 3 in bspt	
Fluid outlet size		
Aluminium (3300A)	3 in npt(f) or 3 in bspt	
Polypropylene (3300P)	3 in raised face ANSI/DIN flange	
Stainless Steel (3300S)	3 in npt(f) or 3 in bspt	
Weight		
Aluminium (3300A)	68 kg (150 lb)	
Polypropylene (3300P)	90.7 kg (200 lb)	
Stainless Steel (3300S)	115.6 kg (255 lb)	
Wetted parts		
Aluminium (3300A)	coated carbon steel, aluminium and material(s) chosen for seat, ball, and diaphragm options	
Polypropylene (3300P)	polypropylene and material(s) chosen for seat, ball, and diaphragm options	
Stainless Steel (3300S)	stainless steel and material(s) chosen for seat, ball, and diaphragm options	
Non-wetted external parts		
	Center Bolts	
Aluminium (3300A)	aluminium coated carbon steel	
Polypropylene (3300P)	polypropylene stainless steel	
Polypropylene (3300P)	aluminium stainless steel	
Stainless Steel (3300S)	polypropylene stainless steel	
Stainless Steel (3300S)	aluminium stainless steel	
Operation Manual		
	3A0410	
Repair/Parts Manual		
	3A0411	

HUSKY MODELS		205 6.3 mm (1/4") 19 l/min. (5 gpm)	1/4"
		307 9.4 mm (3/8") 26 l/min. (7 gpm)	3/8"
		515 12.7 mm (1/2") or 19.1 mm (3/4") 57 l/min. (15 gpm)	1/2" - 3/4"
		716 19.1 mm (3/4") 61 l/min. (16 gpm)	3/4"
		1050 25.4 mm (1") 189 l/min. (50 gpm)	1"
		1590 38.1 mm (1-1/2") 341 l/min. (90 gpm)	1-1/2"
		2150 50.8 mm (2") 568 l/min. (150 gpm)	2"
		3300 76.2 mm (3") 1041 l/min. (275 gpm)	3"
			NEW

* Sound power measured per ISO-9614-2

** Sound pressure was tested 3.28 ft (1 m) from equipment

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.

GRACO BVBA Industrieterrein Oude Bunders • Slakweidestraat 31 • B-3630 Maasmechelen
Tel: +32 (89) 770 700 • Fax: +32 (89) 770 777 • E-mail: info@graco.be • http://www.graco.com

©2012 Graco BVBA 344917ENEU Rev.Ba 06/12 Printed in Europe.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

