

GMax[™] II Standard

The Industry Standard in Petrol-Powered Airless Sprayers



EVERYDAY RELIABILITY

- Trust in proven technology with the Advantage Drive System. Runs quiet and is guaranteed for life!
- Rely on the industry standard: the Graco Endurance™ Pump.
- Count on the SmartControl[™] 3.0 Pressure Control to get your daily job done! It delivers a consistent spray fan without fluctuations while protecting your investment against bad power conditions.



GMax[™] II Standard

Petrol-Powered Airless Sprayers

This is for YOU when you're looking for technology that gets the job done. Technology that has proven to do the trick, time and time again.

The GMax II family consists of Graco's most popular petrol powered airless sprayers for professionals. With over 25 years experience of proven quality and unmatched on-the-job productivity, it has become an industry standard. A standard you can trust to get the job done.

The Standard Series are suited for professionals that don't need extras but are looking for every-day reliability to get the job done fast and easy.

Choose the right unit...


The GMax II range is ideally suited for high production professional contractors who demand uninterrupted performance with freedom from electric power.

The GMAX™ II 3900 (120 cc) is the perfect sprayer for professional paint jobs on new residential construction job sites.

The GMAX II 5900 is a step up from that. With its 160 cc Honda engine, it delivers the output you require for larger commercial paint projects. Along with its high performance 200 cc Honda engine, the GMAX II 7900 HD is equipped with a heavy duty pump, and as such can easily spray all thicker coatings as well as the whole range of primers and paints.

... and go for the Standard Series for everyday reliability!

Have a look at the features that have turned our GMAX II range into the industry standard. Discover this standard, like so many other professionals have already.

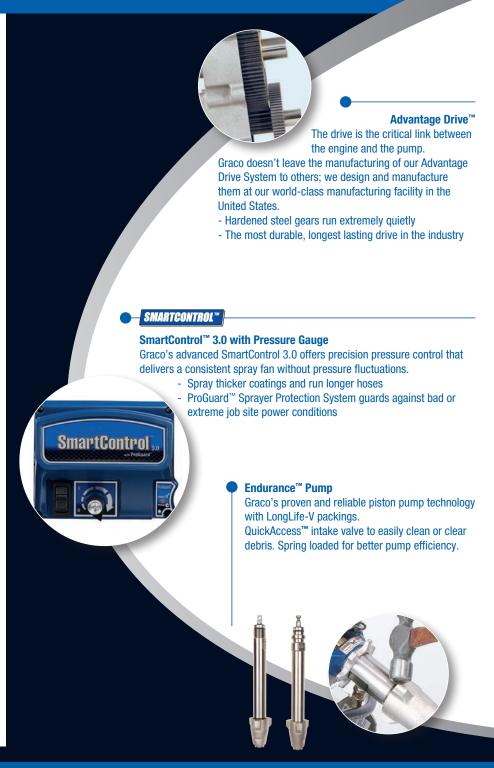



Materials & Applications

The GMAX II STANDARD series are ideal units to spray a full range of coatings on residential, commercial and industrial jobs.

Spray acrylics, primers, emulsions, waterborne and solvent based paints with the 3900 and 5900, or move up to the 7900 HD version and be able to handle most common anti-corrosive and fire retardant paints and airless plasters as well!





TiltBack™ Cart Design

Sprayer kick stand allows convenient, one person bucket change and facilitates cleaning and maintenance of your pump.

www.graco.com

Honda[®] Engines

The industry standard engine for the industry standard sprayer!
All GMAX II units are equipped with contractor preferred Honda engines that deliver unmatched performance to the pump.

With 120 cc, the GMax II 3900 is well suited for professional paint jobs on new residential construction job sites, whereas with the 160 cc displacement on the GMAX II 5900, you can easily tackle bigger commercial sites.

The power horse in this family is the engine on the GMax II 7900 HD. With its 200 cc, it delivers the performance needed to handle the thickest coatings.



GOOD TO KNOW

EXTEND YOUR SPRAYING AUTONOMY

When used with a hopper or container suction kit, you can work for longer periods of time before refilling. Use for overnight storage or to transport your material. You will save energy, time and money.



! TIP

ALWAYS BEGIN WORKING AT LOW MATERIAL PRESSURE.

Slowly raise the pressure, but only to the minimum pressure required for a successful application. Using too much pressure can cause pack-out due to aggregated materials or dirt.

For improved pump performance when spraying paint with the GMAX II 7900 HD unit, replace the ceramic ball in the lower pump with the SST ball (delivered free with the unit).





GMax II Standard Accessories

Get the most out of your equipment, using our professional accessories

Improve your finishing quality



Guns

262114 Contractor™ Airless gun, RAC X™ guard, no tip TexSpray[™] blue gun with RAC X guard 289605

and RAC X 531 tip

245820 Inline™ 4-finger Plaster gun, 280 bar



PAAXXX Blue RAC X tip for paint

HDAXXX Brown RAC X tip for spack, heavy coatings WAXXXX Wide RAC X tip for big surfaces, 120° angle

RAC X quard 246215



RAC X Tip Extensions

287019 25 cm 287020 40 cm 287021 50 cm 287022 75 cm



287026 90 cm ■ 287027 180 cm



Rollers Exterior (complete)

6880095 30 cm fixed 098084 90-180 cm telescopic 098085 45-90 cm telescopic

Hoses (230 bar)



240794 1/4" x 15 m 240797 3/8" x 15 m 1/4" x 30 m 3/8" x 30 m 223771 241275

1/4" x 20 m 241272



Whips (230 bar)

238358 3/16" x 0.9 m

238959 3/16" x 1.4 m

238359 3/16" x 1.8 m



Hose Connectors

1/4" x 1/4" (M) x (M) 156971 157350 1/4" x 3/8" (M) x (M)



Gun, Tip, Hose Kits

Contractor gun, 1/4" X 15 m hose, 3/16" 288491

x 0.9 m whip, RAC X PAA621 tip, 248 bar 289611 TexSpray blue gun, 3/8" X 15 m hose, 1/4"

x 0.9 m whip, RAC X 531/427 tip, 276 bar

289585 Inline 4-finger plaster gun, 1/2" x 15 m hose, 3/8" x 3.6 m whip, RAC X 643 + WA 1239

tip, 280 bar



Standard Endurance™ Pump Lowers

GMax II 3900 16Y598 16Y706 **GMax II 5900** 16X429 GMax II 5900 HD **GMax II 7900** 16X423 16X425 GMax II 7900 HD





90 liter hopper kit 287987 289587 Bag roller

24M445

Heavy duty container suction kit 40 cm 2" hose with 1" to DIN C clamp connectors.

Easy Out™ Gun Filters



287032 Easy Out oun filter, 60 mesh x 1 287033 Easy Out gun filter, 100 mesh x 1 287034 Kit: 60 mesh x 1 + 100 mesh x 1

Easy Out™ Pump Filters

244071 30 mesh, grey 244068 100 mesh, blue 244067 60 mesh, black 244069 200 mesh, red



Liquids

206994 TSL™ 0.25 I 253574 Pump Armor[™] 1 I 245133 Pump Armor 3.8 I



Unpack, plug & spray!

Ready to go, the GMax Standard Series ship complete and ready to spray

SmartControl™ 3.0, TiltBack™ cart design, whip hose, BlueMax™ II hose 15m, 246215 RAC X HandTite™ guard, gun, 206994 TSI ™ 0.25 liter.

Find this unit at:

GRACO BVBA • Fluid Handling Solutions

Specifications



	GMAX II 3900	GMAX II 5900	GMAX II 5900 HD	GMAX II 7900	GMAX II 7900 HD
	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
Part Numbers:	16W865	16W869	16W889	16W883	16W890
Max. Tip Size:	0.036"	0.043"	0.043	0.048	0.048"
Flow - I/min. (gpm)	4.7 (1.25)	6.0 (1.6)	6.0 (1.6)	8.3 (2.2)	8.3 (2.2)
Max. Pressure - bar (PSI)	230 (3300)	230 (3300)	230 (3300)	230 (3300)	230 (3300)
Pump	Paint	Paint	HD Texture	Paint	HD Texture
Weigth - kg (lbs)	48.2 (106)	62.7 (138)	62.7 (138)	66.4 (146)	71.4 (157)
Engine Displacement Honda®	120 cc	160 cc	160 cc	200 cc	200 cc
BlueMax™ II Hose	1/4" x 15m	1/4" x 15m	3/8" x 15m	3/8" x 15m	3/8" x 15m
Gun	Contractor	Contractor	HD Texture	Contractor	HD Texture
Tip Standard	RAC X 517	RAC X 517	PAA427/HDA531	PAA517	PAA427/HDA531
Rod	CrN	CrN	Chrome	MaxLife	Chrome
Sleeve	Chrome	Chrome	Chrome	MaxLife	MaxLife

© 2014 Graco BVBA · Form No. 300718ENEU (rev.Aa) · 06/14 · Printed in Europe.